



Parallelweg 36
NL-6922 HR Duiven

Tel: +31 316 267291
Mob: +31 6 53 15 02 83
info@beilite-europe.com
www.beilite-europe.com


BEILITE®Europe

BLTB 40 - 175L

Hydraulikhammer für Bagger mit einem Gewicht von 0,8 bis 50t Hydraulic Hammer for Excavators from 0,8 till 50t

Alle Modelle werden mit 1 Spitzmeissel, 1 Flachmeissel, Schlauchsatz, Werkzeugkiste, N2 Füllgerät, CE Zertifikat, Ersatzteillbuch, Sicherheits-, Wartungs-, Reparatur- und Betriebsanleitung geliefert. Irrtum und Änderungen vorbehalten.

All models are delivered with 1 point chisel, 1 flat chisel, hose set, tool box, N2 filling device, CE certificate, spare parts book, safety, maintenance, repair and operating instructions. Subject to errors and changes.

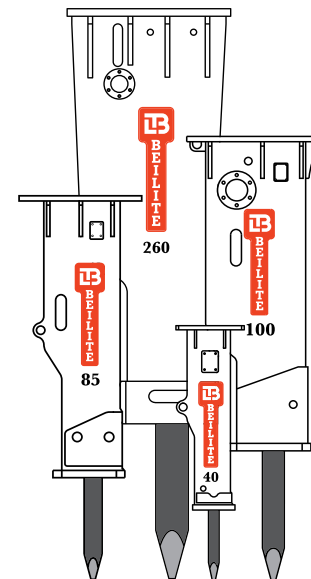

Deutsch English		BLTB 40	BLTB 45	BLTB 53	BLTB 60	BLTB 70	BLTB 75	BLTB 85	BLTB 100A	BLTB 125A	BLTB 135A	BLTB 140A	BLTB 150	BLTB 155B	BLTB 165	BLTB 175L
GESAMTGEWICHT WORKING WEIGHT	kg	86	137	180	263	362	466	666	986	1357	1736	1910	2318	2610	3149	4575
	lb	190	302	397	580	800	1027	1468	2174	2992	3827	4211	5110	5754	6942	10086
GESAMTLÄNGE TOTAL LENGTH	mm	973	1093	1196	1223	1402	1588	1839	2061	2267	2312	2402	2671	2742	2929	3238
	inch	43,9	50,4	56,9	58,2	65,0	73,3	84,3	90,9	102,7	106,5	109,7	123,1	124,4	132,6	145,0
ÖLFLUSS WORKING OIL FLOW	l/min	15~30	20~40	20~50	30~60	40~70	50~90	60~100	80~110	90~120	120~180	120~180	150~210	180~240	200~260	220~270
	gal/min	4~7.9	5.3~10.6	5.3~13.2	10.6~18.5	10.6~18.5	13.2~23.8	15.9~26.4	21.1~29.1	23.8~31.7	31.7~47.6	31.7~47.6	39.6~55.5	47.6~63.4	52.8~68.7	58.1~71.3
BAGGER-EINSTELLDRUCK SET PRESSURE EXCAVATOR	bar	130	140	150	160	160	180	180	210	210	210	210	230	250	260	280
	psi	1885	2031	2176	2321	2321	2611	2611	3046	3046	3046	3046	3336	3626	3771	4061
BETRIEBSDRUCK OPERATING PRESSURE	bar	90~120	90~120	90~120	100~130	110~140	120~150	130~160	150~170	150~170	160~180	160~180	180~200	200~220	210~230	230~250
	psi	1305~1740	1305~1740	1305~1740	1595~2031	1595~2031	1740~2176	1885~2321	2176~2466	2176~2466	2321~2611	2321~2611	2611~2901	2901~3191	2901~3191	2901~3336
SCHLAGFREQUENZ IMPACT RATE	bpm	800~1400	700~1200	600~1100	500~1000	500~900	400~800	400~800	350~700	350~650	350~500	350~500	200~300	200~300	150~300	130~200
WERKZEUGDURCHMESSER CHISEL DIAMETER	mm	40	45	53	60	70	75	85	100	125	135	140	150	155	165	175
	inch	1,6	1,8	2,1	2,4	2,8	3,0	3,3	3,9	4,9	5,3	5,5	5,9	6,1	6,5	6,9
WERKZEUGLÄNGE CHISEL LENGTH	mm	450	500	580	600	700	750	850	1000	1100	1200	1250	1400	1400	1450	1500
	inch	17,7	19,7	22,8	23,6	27,6	29,5	33,5	39,4	43,3	47,2	49,2	55,1	55,1	57,1	59,1
SCHLAUCHANSCHLUSS HOSE DIAMETERw	inch	1/2	1/2	1/2	1/2	1/2	1/2	3/4	3/4	1	1	1	1	1 1/4	1 1/4	1 1/4
KOLBENSPEICHERDRUCK N2 PRESSURE (BACK HEAD)	bar	14~17	14~17	14~17	14~17	14~17	14~17	14~17	14~17	14~17	14~17	14~17	17~20	17~20	18~22	25~28
	psi	203~247	203~247	203~247	203~247	203~247	203~247	203~247	203~247	203~247	203~247	203~247	247~290	247~290	261~319	363~406
AKKUMULATORDRUCK N2 PRESSURE (ACCUMULATOR)	bar	/	/	/	/	/	/	/	55~60	55~60	55~60	55~60	55~60	55~60	55~60	55~60
	psi	/	/	/	/	/	/	/	798~870	798~870	798~870	798~870	798~870	798~870	798~870	798~870
SCHALL 85DB(A)-ENTFERNUNG NOISE 85DB(A)-DISTANCE	m	2~5	3~6	4~8	5~10	5~10	6~12	6~12	7~14	10~18	16~22	16~22	21~30	26~35	35~40	38~45
BAGGERGRÖSSE APPLICABLE EXCAVATOR	t	0.8~1.2	1~2.5	1.5~3.5	3.0~5.5	4.5~6	6~8.5	7~11	10~16	14~20	18~25	20~24	24~27	27~33	33~38	40~50

LB

BEILITE® EUROPE B.V.

DA:EDA
DEUTSCHER
ABBRUCHVERBAND
EUROPEAN
DEMOLITION
ASSOCIATION



BEILITE
EUROPE

LB BEILITE

135A

HYDRAULIC HAMMER
WITH 135MM BORE

BEILITE EUROPE B.V.

COPYRIGHT 2023 © BEILITE®EUROPE B.V. ALL RIGHTS RESERVED. Subject to errors and changes. Our general terms and conditions apply, published at www.beilite-europe.com

Hydraulikhammer | Hydraulic Hammer
2023